

TH-IR SERIES

TRIANGULAR HOUSINGS


OPTIONS

All housings are supplied with adjustable camera mounts. Tamper and vibration sensing switches are available for all models.

APPLICATIONS

Correctional services housings designed to fit in corners, against the ceiling.

SPECIFICATIONS	
CONSTRUCTION	1.6mm zinc anneal
FINISH	Black texture polyester powder coat
LENS	6mm polycarbonate
CABLE ENTRY	Triangular opening at rear of housing
ACCESS	M6 post cap screws
ELECTRICAL	N/A
MAX CAMERA SIZE	Refer to 'B' dimension
IP RATING	IP55

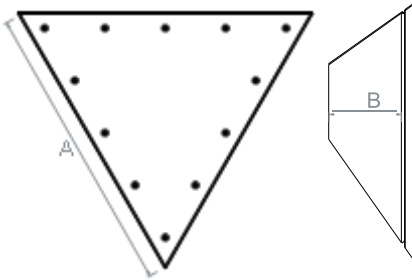

Model number	Dimension A	Dimension B	Weight
TH600-IR	600mm	228mm	6.3kg
TH724-IR	724mm	290mm	10.3kg

Secure triangular corner mount housings to suit PCB and conventional cameras with an added infrared illuminator camera commonly used in Correctional Service environments.

The cover is recess mounted into the steel frame ensuring that tools cannot be inserted to prise the lens away from the housing. Featuring rugged construction, tamper resistance and with no centre projections the enclosures limit self-harm issues.

New bracket design for the 485 and 600 models allows easier adjustment and more positive locking action for the camera. The CMH01 & CMH02 accept similar sized cameras as the TH485 & TH600 in a more compact housing when space is limited.